




SOUNDER

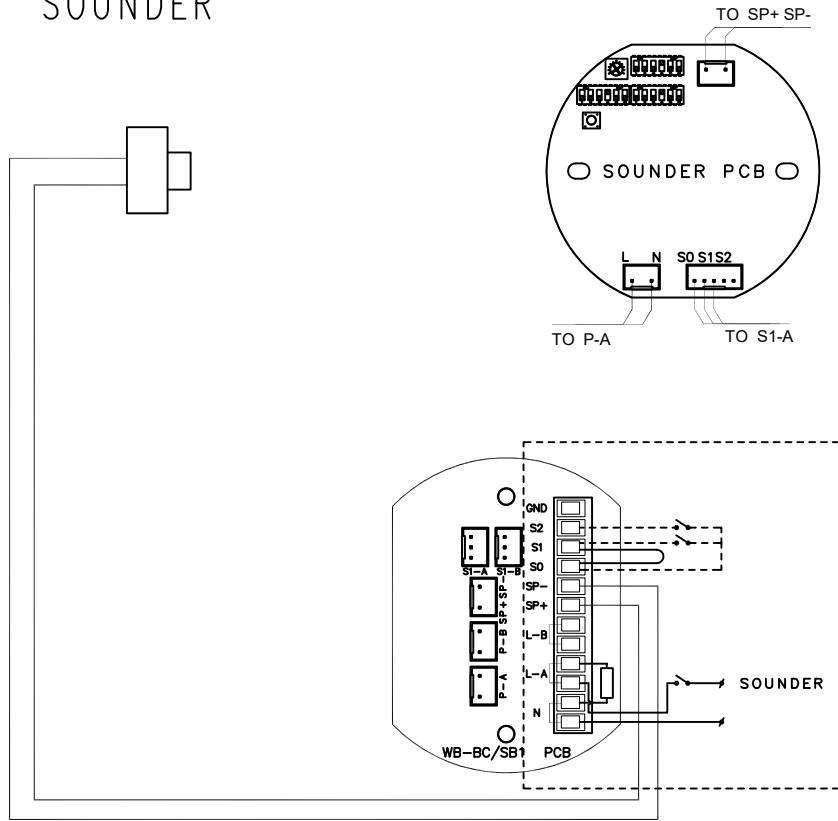

AC BUILDS



SOUNDER

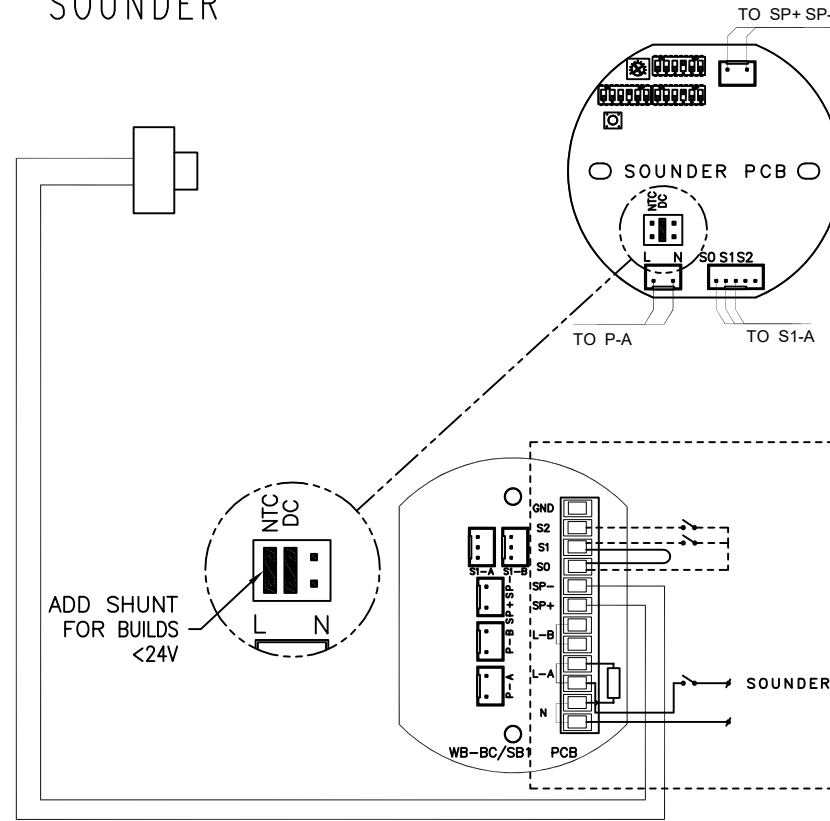

DC BUILDS

WIRING AND FUNCTION

FOR DC POWER SUPPLY:
"L" EQUAL "B+", "N" EQUAL "0"

APPLY POWER SUPPLY:
AC 100-230V OR DC 12V-48V TO
"L"&"N"

CONNECT L-A TO START
SOUNDER

IF YOU NEED TO ADD A
RESISTANCE. PLEASE CONNECT
THE RESISTANCE BETWEEN "L" &
"N"

TO ADJUST THE SOUNDER TONE,
PLEASE REFER TO THE
INSTRUCTIONS IN THE PRODUCT
TECHNICAL MANUAL

DO NOT SUPPLY AC OR DC
POWER TO S0 /S1/S2

RESISTOR(S)
END OF LINE (EOL)
VALUE: Ω

Cable Selection

Please select suitable size cable according to the distance between control room and the terminals and the quantity of equipments used.

Normal size for AC power supply cable L & N is 1.5mm². Normal size for DC power supply cable L & N is 2.5 mm².

Please select the quantity of control cables according to the actual requirement. Normal size for control cable is 1mm².



DRAWN: A.S.M.	FINISH: AS PARTS	MATERIAL: AS PARTS
DATE: 13/09/2024	TITLE: EX-TECH WIRING DIAGRAM	
CHECKED: A.J.	SD125 SD150	
DATE: 13/09/2024	STANDARD WIRING WITH RESISTOR(S) NO DIODE(S)	

NO PART OF THIS DRAWING MAY BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY

SCALE: A3	DWG No.	1
NTS	2146/A3	